




for a greener tomorrow




MODEL		CP-30W	CP-31W	P93E	P93DW
Applications	Digital Photos	-	-	-	-
	ID Photos	-	-	-	-
	Event Photography	-	-	-	-
	System Integration	-	-	-	-
	Medical Imaging	✓	✓	✓	✓
	Manufacturing	✓	✓	✓	✓
	Security	✓	✓	✓	-
Dimensions W x D x H (mm)		212 x 425 x 125	212 x 425 x 125	154 x 256 x 89.5	154 x 256 x 89.5
Weight		7.3kg approx.	7.6kg approx.	2.8kg approx.	2.8kg approx.
Power Source / Frequency		AC120V 50/60Hz, AC220-240V 50/60Hz	AC120V 50/60Hz, AC220-240V 50/60Hz	AC100V 50/60Hz	AC100-240V 50/60Hz
Power Consumption		1.7A (printing / 120V), 1.0A (printing / 200-240V)	1.7A (printing / 120V), 1.0A (printing / 200-240V)	1.5-0.8A (printing / 100-240V)	1.5-0.8A (printing / 100-240V)
Print Method		Dye sublimation thermal transfer	Dye sublimation thermal transfer	Thermal printing on thermal sensitive paper	Thermal printing on thermal sensitive paper
Resolution / Gradation		423 dpi / 256 gradations of Y / M / C	423 dpi / 256 gradations of Y / M / C	325 dpi / 256 tones	325 dpi / 256 tones
Interface		RGB analogue; S-Video; Composite Video	S-Video; Composite Video	NTSC; PAL; Composite	USB
Print Speed		S size - 16 secs approx.; L size - 25 secs approx.	3P - S size - 16 secs approx.; 3P - L size - 25 secs approx.; 4P - S size - 20 secs approx.; 4P - L size - 31 secs approx.	Normal - NTSC - 3.3 secs approx.; Normal - PAL - 3.9 secs approx. (Excluding data transfer time)	Normal - 3.7 secs approx. (Excluding data transfer time)
Paper Size		S size - 94 x 100mm (3.70 x 3.94"); L size - 100 x 184mm (3.94 x 5.00")	S size - 94 x 100mm (3.70 x 3.94"); L size - 100 x 184mm (3.94 x 5.00")	Normal - 100 x 110mm (3.94 x 4.33")	Normal - 100 x 110mm (3.94 x 4.33")
Print Size (max.)		S size - 72 x 96mm (2.83 x 3.78"); L size - 96 x 126mm (3.78 x 4.96")	S size - 72 x 96mm (2.83 x 3.78"); L size - 96 x 126mm (3.78 x 4.96")	Normal - 75 x 100mm (2.95 x 3.94")	Normal - 75 x 100mm (2.95 x 3.94")
Media		CK30S - 80 prints x 3 packs; CK30L - 50 prints x 4 packs	CK30S - 80 prints x 3 packs; CK30L - 50 prints x 4 packs	KP65HM-CE - 245 prints x 4 rolls; KP61B-CE - 245 prints x 4 rolls; KP91HG-CE - 220 prints x 4 rolls	KP65HM-CE - 245 prints x 4 rolls; KP61B-CE - 245 prints x 4 rolls; KP91HG-CE - 220 prints x 4 rolls





## Printing solutions

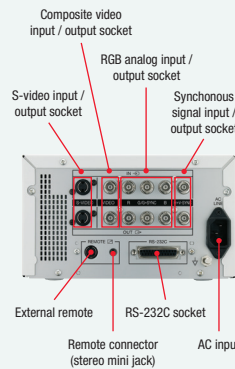

ANALOG RGB

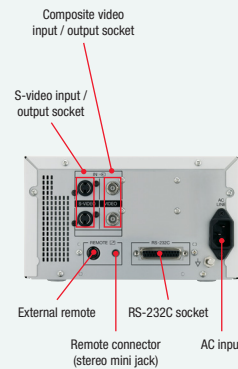

MONOCHROME

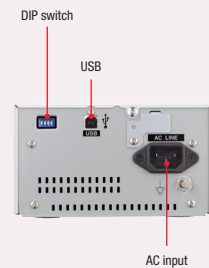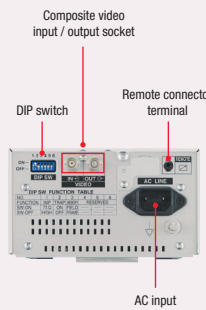

For Driver information please visit the website below.

Issued February 2013. Specifications are subject to change without notice (E&O.E.)

UK & Middle East

+ 44 1707 278 684

[vis.mitsubishielectric.co.uk](http://vis.mitsubishielectric.co.uk)

[printer.info@meuk.mee.com](mailto:printer.info@meuk.mee.com)



[vis.mitsubishielectric.co.uk](http://vis.mitsubishielectric.co.uk)

[printer.info@meuk.mee.com](mailto:printer.info@meuk.mee.com)



MODEL		CP-K60DW	CP-D70DW	CP-D707DW	CP9600DW	CP3800DW	CP30DW
Applications	Digital Photos	✓	✓	✓	✓	✓	✓
	ID Photos	✓	✓	✓	✓	-	-
	Event Photography	✓	✓	✓	✓	✓	-
	System Integration	✓	✓	✓	✓	✓	-
	Medical Imaging	-	-	-	-	-	✓
	Manufacturing	-	-	-	-	-	✓
	Security	-	-	-	-	-	-
Dimensions W x D x H (mm)		275 x 446 x 170	275 x 446 x 170	275 x 446 x 340	300 x 365 x 325	322 x 366 x 170	212 x 425 x 125
Weight		12kg approx.	12kg approx.	22kg approx.	17kg approx.	14kg approx.	7.3kg approx.
Power Source / Frequency		AC120V 50/60Hz, AC220-240V 50/60Hz	AC120V 50/60Hz, AC220-240V 50/60Hz	AC120V 50/60Hz, AC220-240V 50/60Hz	AC120V 50/60Hz, AC220-240V 50/60Hz	AC120V ~ 240V 50/60Hz	AC120V 50/60Hz, AC220-240V 50/60Hz
Power Consumption		4.6A (printing / 120V), 2.4A (printing / 200-240V)	4.6A (printing / 120V), 2.4A (printing / 200-240V)	5.1A (printing / 120V), 2.6A (printing / 200-240V)	2.9A (printing / 120V), 1.6A (printing / 220-240V)	4.0A (printing / 120V), 1.7A (printing / 220-240V)	1.5A (printing / 120V), 0.9A (printing / 200-240V)
Print Method		Dye sublimation thermal transfer	Dye sublimation thermal transfer	Dye sublimation thermal transfer	Dye sublimation thermal transfer	Dye sublimation thermal transfer	Dye sublimation thermal transfer
Resolution / Gradation		300 dpi / 256 gradations of Y / M / C	300 dpi / 256 gradations of Y / M / C	300 dpi / 256 gradations of Y / M / C	600 dpi / 256 gradations of Y / M / C	300 x 300 dpi standard mode; 300 x 600 dpi high quality mode / 256 gradations of Y / M / C	423 dpi / 256 gradations of Y / M / C
Interface		USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0
Print Speed		10 x 15cm (4 x 6") - 11.4 secs approx. 15 x 20cm (6 x 8") - 21.9 secs approx.	10 x 15cm (4 x 6") - 8.4 secs approx. 13 x 18cm (5 x 7") - 12.7 secs approx. 15 x 20cm (6 x 8") - 14.5 secs approx. 15 x 23cm (6 x 9") - 15.9 secs approx. (Excluding data transfer time)	10 x 15cm (4 x 6") - 5.9 secs approx. 13 x 18cm (5 x 7") - 9.4 secs approx. 15 x 20cm (6 x 8") - 10.6 secs approx. 15 x 23cm (6 x 9") - 11.7 secs approx. (Excluding data transfer time. When the same size is printed with the upper and lower decks simultaneously)	10 x 15cm (4 x 6") - 20 secs approx. 13 x 18cm (5 x 7") - 28 secs approx. 15 x 20cm (6 x 8") - 32 secs approx. 15 x 23cm (6 x 9") - 38 secs approx. (Excluding data transfer time)	20 x 25cm (8 x 10") - 30 secs approx. 20 x 30cm (8 x 12") - 35 secs approx.	S size - 16 secs approx.; L size - 25 secs approx. (Excluding data transfer time)
Paper Size		CK-K76R - 102 x 152mm (4 x 6") - 152 x 203mm (6 x 8")	CK-D746 - 102 x 152mm (4 x 6"); CK-D757 - 127 x 178mm (5 x 7"); CK-D768 - 152 x 203mm (6 x 8"); CK-D769 - 152 x 229mm (6 x 9")	CK-D746 - 102 x 152mm (4 x 6"); CK-D757 - 127 x 178mm (5 x 7"); CK-D768 - 152 x 203mm (6 x 8"); CK-D769 - 152 x 229mm (6 x 9")	CK9046 - 102 x 152mm (4 x 6"); CK9057 - 127 x 178mm (5 x 7"); CK6069 - 152 x 203mm (6 x 8"); CK6069 - 152 x 229mm (6 x 9")	CK3810 - 203 x 254mm (8 x 10"); CK3812 - 203 x 305mm (8 x 12")	S size - 94 x 100mm (3.70 x 3.94"); L size - 100 x 184mm (3.94 x 5.00")
Print Size (max.)		Full bleed image	Full bleed image	Full bleed image	Full bleed image	Full bleed image	S size - 72 x 96mm (2.83 x 3.78"); L size - 96 x 126mm (3.78 x 4.96")
Media		CK-K76R - (4 x 6") 320 prints x2 rolls - (6 x 8") 160 prints x2 rolls	CK-D746 - 400 prints x 2 rolls; CK-D757 - 230 prints x 2 rolls; CK-D768 - 200 prints x 2 rolls; CK-D769 - 180 prints x 2 rolls	CK-D746 - 400 prints x 2 rolls; CK-D757 - 230 prints x 2 rolls; CK-D768 - 200 prints x 2 rolls; CK-D769 - 180 prints x 2 rolls	CK9046 - 600 prints x 1 roll; CK9057 - 350 prints x 1 roll; CK6069 - 270 prints x 1 roll	CK3810 - 130 prints x2 rolls CK3812 - 110 prints x 2 rolls	CK30S - 80 prints x 3 packs; CK30L - 50 prints x 4 packs
Rear Panel							